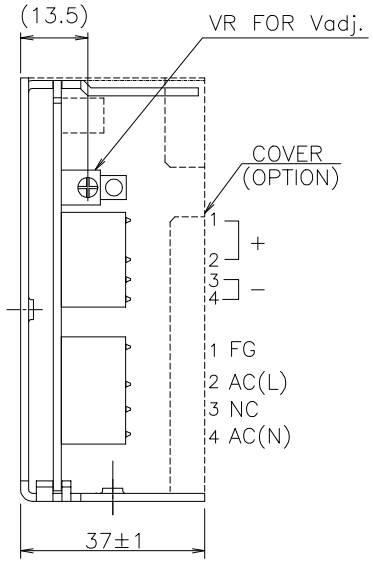

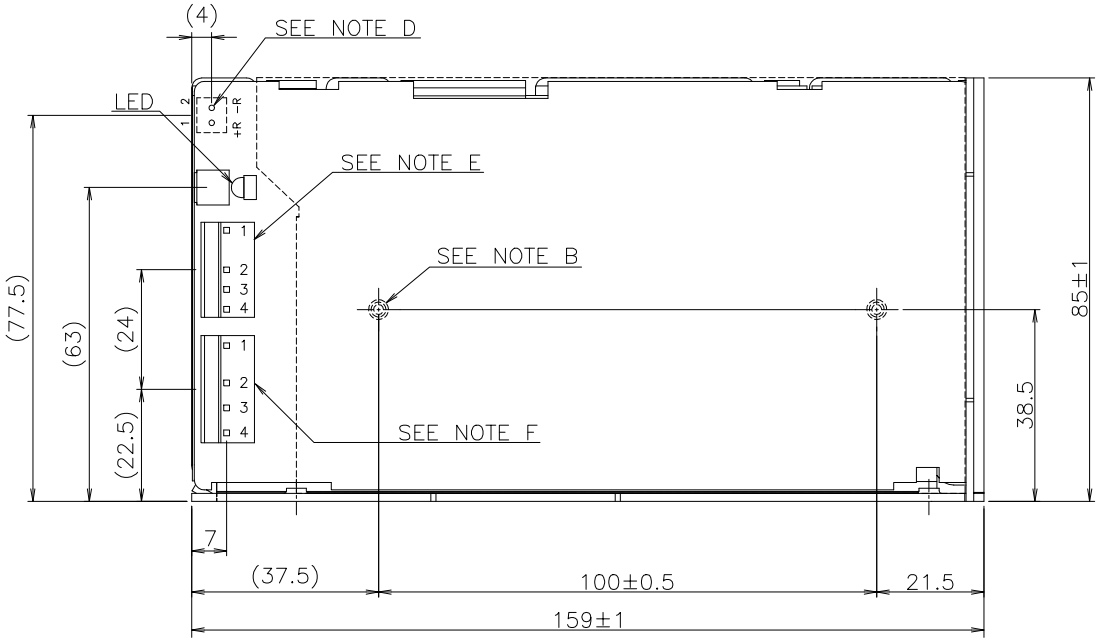

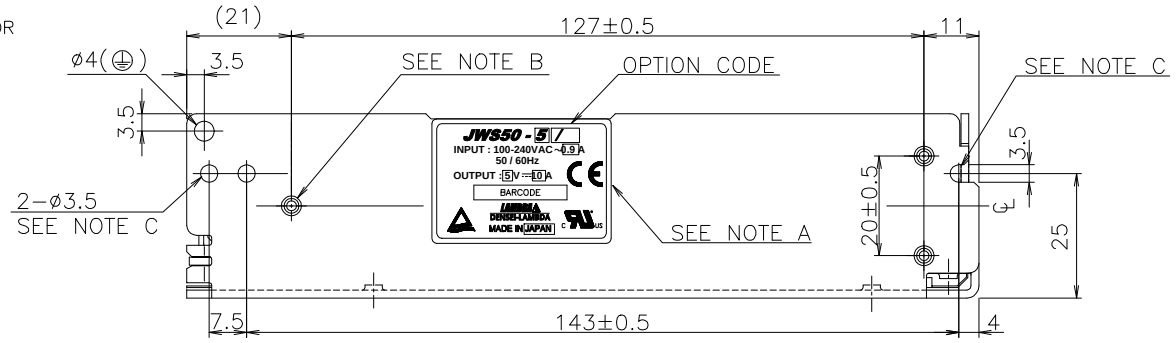

NOTES

A: MODEL NAME, OPTION, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

B: M3 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (5) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.

C: ø3.5 HOLES (3) FOR CUSTOMER CHASSIS MOUNTING. (USE M3 MOUNTING SCREWS.)

D: REMOTE CONTROL CONNECTOR --- OPTION B2B−XH−AM (JST)

E: CONNECTOR: 5277−04A (MOLEX)

F: CONNECTOR: 5289−4A (MOLEX)

ACCESSORIES

* HOUSING: 5196−04 (MOLEX), TERMINAL: 5194PBT (MOLEX)
* HOUSING: 5199−04 (MOLEX), TERMINAL: 5194PBT (MOLEX)
* HOUSING: XHP−2 (JST), TERMINAL: BXH−001T−P0.6 (JST) OR SXH−001T−P0.6 (JST) --- OPTION

HAND CRIMPING TOOL : YC−110R (JST) OR YRS−110 (JST)

OPTIONAL MODELS

MODEL	COVER	REMOTE ON/OFF CONTOL	CONNECTOR INPUT/OUTPUT
JWS50−* /B			○
JWS50−* /C	○		○
JWS50−* /RB		○	○
JWS50−* /RC	○	○	○

(unit : mm)

MODEL	JWS50/B
DENSEI-LAMBDA	

A157−02−01/B−B