



NAME PLATE



SEE NOTE A

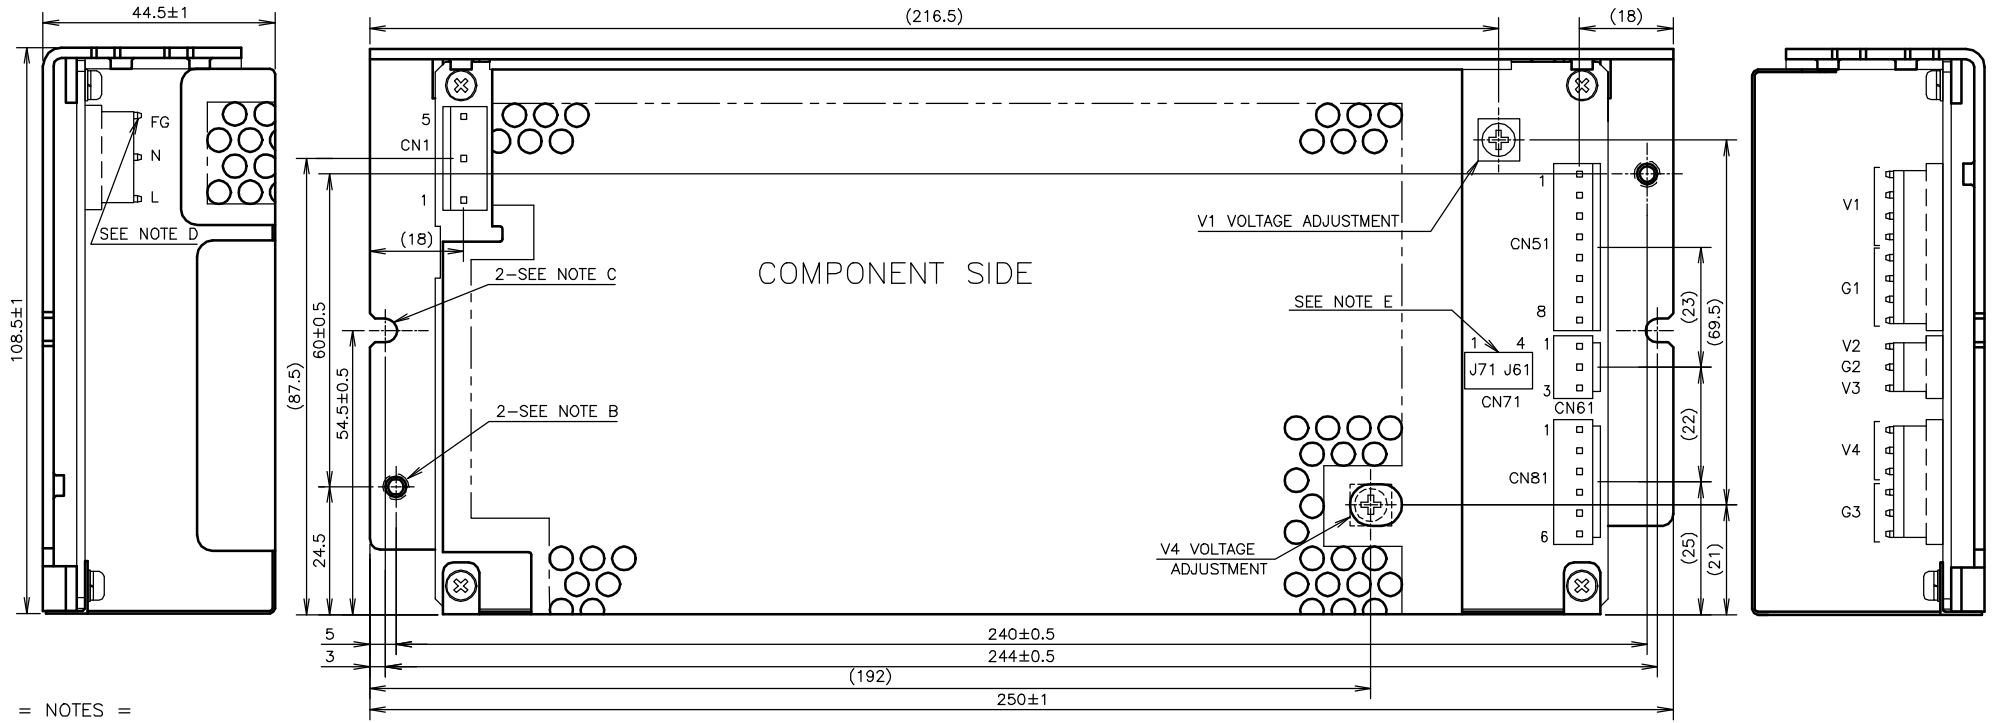

= NOTES =

- A: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B: M4 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (6) FOR CUSTOMER'S CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6mm.
- C: Ø4.5 HOLES (6) FOR CUSTOMER'S CHASSIS MOUNTING. (USE M4 MOUNTING SCREW.)
- D: FG IS FOR SAFETY GROUND CONNECTION.
- E: CONNECTOR TO CHANGE V2,V3 OUTPUT VOLTAGE (CN71) : B4B-XH-AM (J.S.T.)
 J61 SHORT : V2 OUTPUT VOLTAGE IS +12V.(*)
 J61 OPEN : V2 OUTPUT VOLTAGE IS +15V.
 J71 SHORT : V3 OUTPUT VOLTAGE IS -12V.(*)
 J71 OPEN : V3 OUTPUT VOLTAGE IS -15V.

*J61 AND J71 ARE NORMALLY SHORTED BY JM-2W-96(J.S.T.).

CONNECTORS USED:

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
PIN HEADER (INPUT SIDE CN1)	B3P-5-VH	J.S.T.	1
PIN HEADER (OUTPUT SIDE CN51)	B8P-VH	J.S.T.	1
PIN HEADER (OUTPUT SIDE CN61)	B3P-VH	J.S.T.	1
PIN HEADER (OUTPUT SIDE CN81)	B6P-VH	J.S.T.	1

*OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.

MATCHING HOUSINGS & PINS (NOT INCLUDED WITH THE PRODUCT):

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
SOCKET HOUSING (CN1)	VHR-5N	J.S.T.	1
SOCKET HOUSING (CN51)	VHR-8N	J.S.T.	1
SOCKET HOUSING (CN61)	VHR-3N	J.S.T.	1
SOCKET HOUSING (CN81)	VHR-6N	J.S.T.	1
TERMINAL PINS (CN1,51,61,81)	SVH-21T-P1.1	J.S.T.	20

HAND CRIMPING TOOL : YC-160R

MANUFACT. : J.S.T.

(unit : mm)

MODEL NAME	ZWQ130/A
DENSEI-LAMBDA	

A191-02-01/A-A