


**NOTES**

- A: 5- $\phi$ 3.5 HOLES FOR CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
- B: MODEL NAME, OPTION, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- C: COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.
- D: TO KEEP THE DISTANCE MORE THAN 4mm BETWEEN PCB EDGE AND CUSTOMER'S CHASSIS.
- E: CONNECTOR: 1-316132-5 (A.M.P) (MATCHING HOUSING : 1-178128-5 (A.M.P)) \*1
- F: CONNECTOR: 1-178318-5 (A.M.P) (MATCHING HOUSING : 1-178288-8 (A.M.P)) \*1  
 \*1: MATCHING CONTACT  
 WIRE SIZE  
 AWG20-16 : 1-175218-5 (A.M.P) OR 1-175196-5 (A.M.P)  
 AWG16-12 : 1-917511-5 (A.M.P) OR 1-917484-5 (A.M.P)
- G: NO CONTACT PIN No.2,4
- H: REMOTE ON/OFF CONTROL CONNECTOR : B2B-XH-AM (JST) -----OPTION  
 MATCHING HOUSING : XHP-2 (JST)  
 MATCHING TERMINAL : BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST)

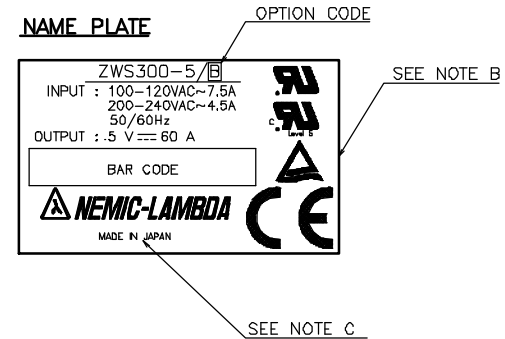

**OPTIONAL MODELS**

MODEL	REMOTE ON/OFF CONTROL
ZWS300-*/B	-
ZWS300-*/RB	○

(unit : mm)

MODEL NAME	ZWS300/B

A177-02-01/B