

CONNECTORS USED:

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
PIN HEADER (INPUT SIDE CN1)	5414-30B	MOLEX	1
PIN HEADER (OUTPUT SIDE CN51)	5273-06A	MOLEX	1
PIN HEADER (OUTPUT SIDE CN53)	5273-07A	MOLEX	1

*OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.


MATCHING HOUSINGS & PINS (NOT INCLUDED WITH THE PRODUCT):

SOCKET HOUSING (CN1)	5195-06	MOLEX	1
SOCKET HOUSING (CN51)	5195-06	MOLEX	1
SOCKET HOUSING (CN53)	5195-07	MOLEX	1
TERMINAL PINS (CN1,51,53)	5194PBTL	MOLEX	16

HAND CRIMPING TOOL : JHTR5904

MANUFACTURER : MOLEX

NAME PLATE

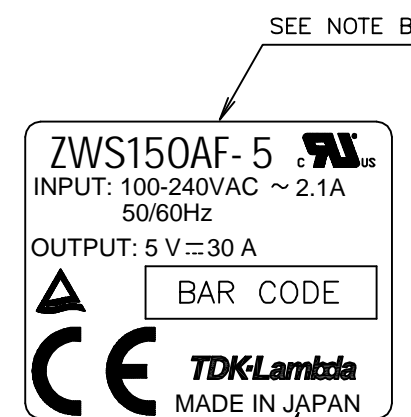

SEE NOTE C

NOTES

- A: THE 4- ϕ 3.5 HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
- B: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- C: COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.
- D: TO KEEP THE DISTANCE MORE THAN 4mm BETWEEN PCB EDGE AND CUSTOMER'S CHASSIS.
- E: FG IS FOR SAFETY GROUND CONNECTION.
- F: REMOTE ON/OFF CONTROL CONNECTOR (CN2,CN52) : B2B-XH-AM (J.S.T.)
 *CN2 IS NORMALLY SHORTED BY JM-2W-96 (J.S.T.).
 MATCHING HOUSING : XHP-2 (J.S.T.)
 MATCHING TERMINAL : BXH-001T-P0.6 (J.S.T.) OR SXH-001T-P0.6 (J.S.T.)
 HAND CRIMPING TOOL : YC-110R OR YRS-110 MANUFACTURER : J.S.T.

(unit : mm)

MODEL	ZWS150AF
DENSEI-LAMBDA	

A196-02-01E