
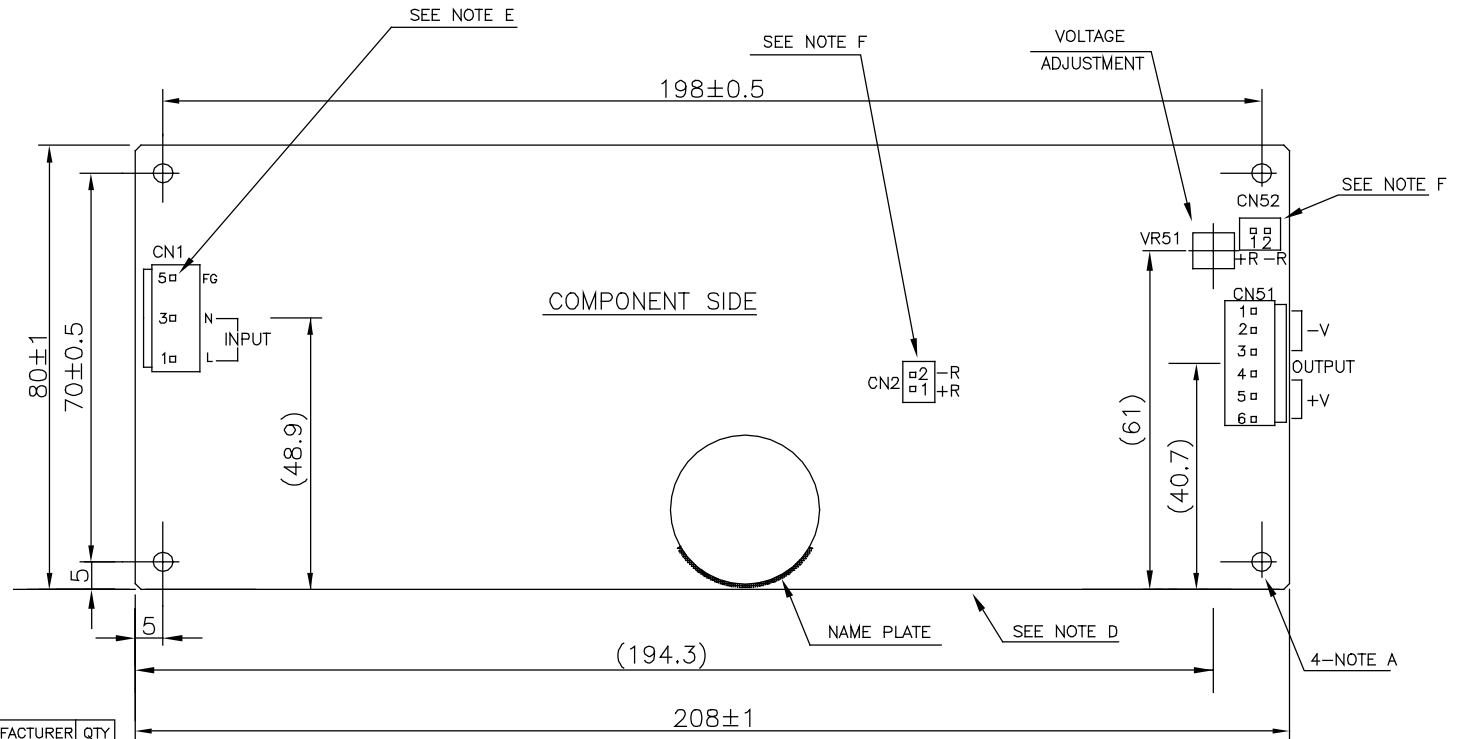


LEAD CUT  
LESS THAN 3mm

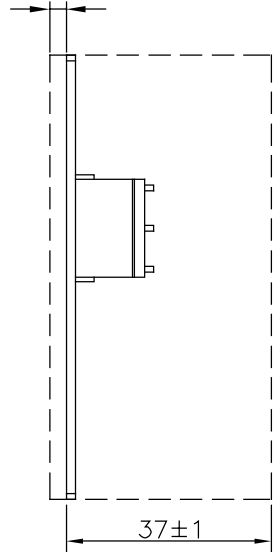

**CONNECTORS USED**

PART DESCRIPTION	PART NAME	MANUFACTURER	QTY
PIN HEADER (INPUT SIDE CN1)	B3P-5-VH	J.S.T.	1
PIN HEADER(OUTPUT SIDE CN51)	B6P-VH	J.S.T.	1

\* OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.


**MATCHING HOUSINGS & PIN.**

\* NOT INCLUDED WITH THE PRODUCT.

SOCKET HOUSING (CN1)	VHR-5N	J.S.T.	1
SOCKET HOUSING (CN51)	VHR-6N	J.S.T.	1
TERMINAL PINS (CN1, CN51)	SVH-21T-P1.1	J.S.T.	9

HAND CRIMPING TOOL: YC-160R MANUFACTURER: J.S.T.

NAME PLATE SEE NOTE B

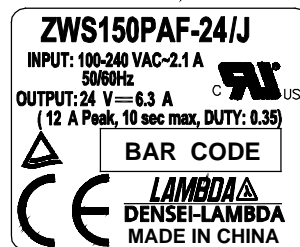

SEE NOTE C

**NOTES:**

- A. THE 4- $\phi$ 3.5 HOLES ARE CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
- B. MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- C. COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.
- D. TO KEEP THE DISTANCE MORE THAN 4m/m BETWEEN PC-BOARD EDGE AND CUSTOMER'S CHASSIS.
- E. FG IS FOR SAFETY GROUND CONNECTION.
- F. REMOTE ON/OFF CONTROL CONNECTOR (CN2,CN52) : B2B-XH-AM (J.S.T.)  
 \*CN2 IS NORMALLY SHORTED BY JM-2W-96(J.S.T.)  
 MATCHING HOUSING : XHP-2 (J.S.T.)  
 MATCHING TERMINAL : BXH-001T-P0.6 (J.S.T.) OR SXH-001T-P0.6 (J.S.T.)  
 HAND CRIMPING TOOL : YC-110R OR YRS-110 MANUFACTURER : J.S.T.

(unit : mm)

MODEL NAME	ZWS150PAF/J
<b>DENSEI-LAMBDA</b>	

CA723-02-01/J