
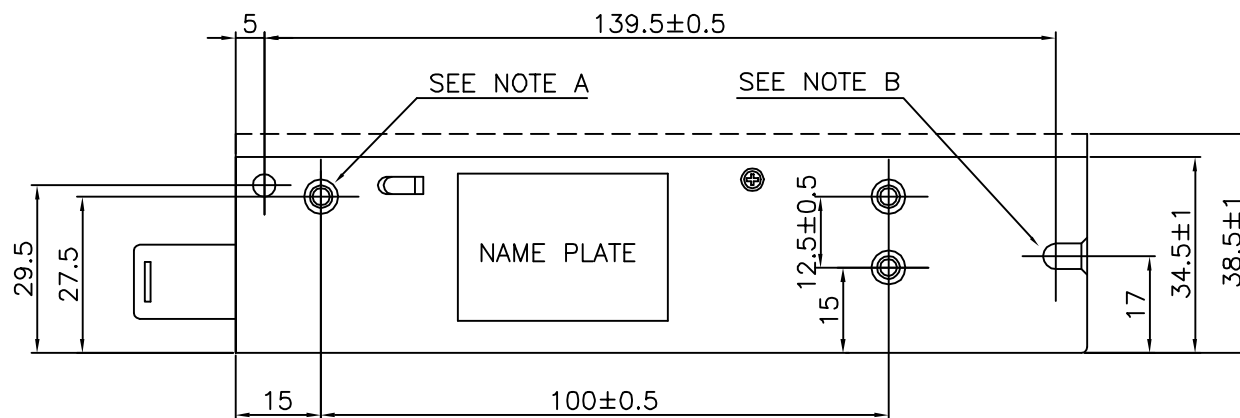


=== NAME PLATE (SCALE:2/1) ===

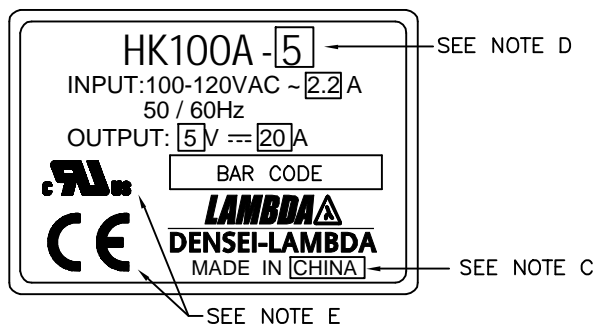

=== NOTES ===

- A : M4 tapped holes for customer chassis mounting.
(Screws must not protrude into power supply)
(by more than 6mm)
- B : $\varnothing 4.5$ holes (2) for customer chassis mounting.
- C : Country of manufacture will be shown here.
- D : Model name and nominal output voltage and maximum output current are shown here in accordance with the specifications.
- E : C-UL-US and CE Marking (Only 3.3V,5V,12V,15V and 24V)

===ACCESSORIES===

- *COVER FOR BARRIER TERMINAL STRIP --- 1
(MOUNTED ON TERMINAL STRIP AT TIME OF SHIPMENT.)
- *METAL PIESES FOR SHORTING PURPOSES ---2
(MOUNTED ON TERMINAL STRIP AT TIME OF SHIPMENT.)

(STANDARD & /A TYPE)

(unit : mm)	
MODEL	HK100A
DENSEI-LAMBDA	
PA783-02-01G	