


NOTES

- A: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B: M4 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (5) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.
- C: $\phi 4.5$ HOLES (2) FOR CUSTOMER CHASSIS MOUNTING. (USE M4 MOUNTING SCREWS.)
- D: RECOMMENDED WIRE TYPE : AWG12-22 (3.5-0.3mm²).

ACCESSORIES

- * COVER FOR BARRIER STRIP TERMINAL
- * SHORT PIECE (NET 2) FOR SHORTING PURPOSE (+S~+V, -S~-V): MOUNTED AT TIME OF SHIPMENT.

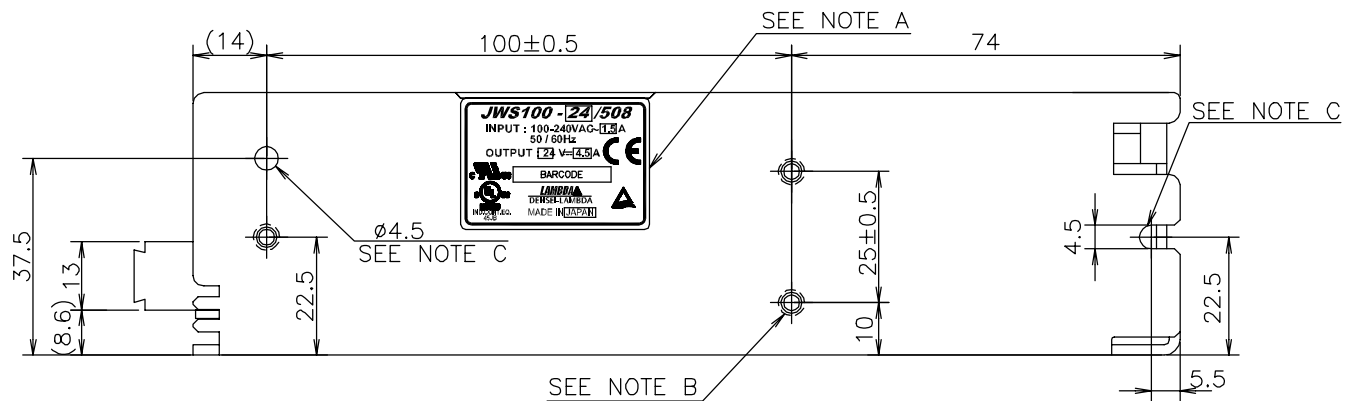

(unit : mm)

| | |
|----------------------|------------|
| MODEL | JWS100/508 |
| DENSEI-LAMBDA | |

A159-02-01/508-A