


NOTES

- A: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B: M3 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (5) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.
- C: $\phi 3.5$ HOLES (3) FOR CUSTOMER CHASSIS MOUNTING. (USE M3 MOUNTING SCREWS.)
- D: RECOMMENDED WIRE TYPE : AWG14-22 (2.0-0.3mm²).

ACCESSORIES

- * COVER FOR BARRIER STRIP TERMINAL

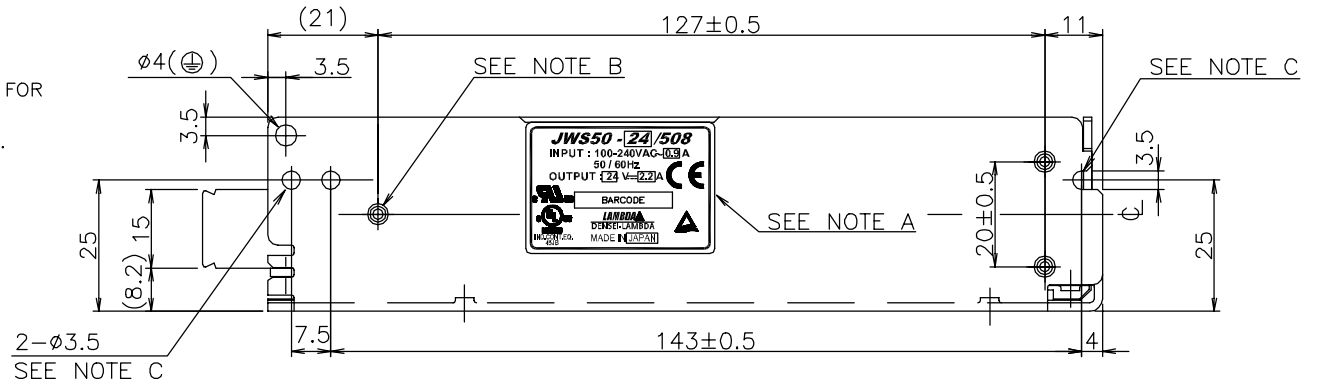

(unit : mm)

MODEL	JWS50/508
DENSEI-LAMBDA	

A157-02-01/508-A