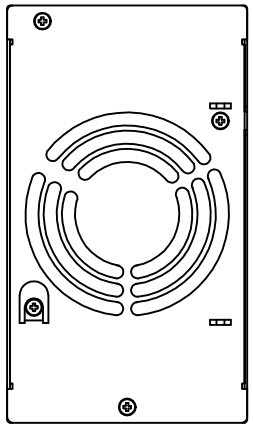

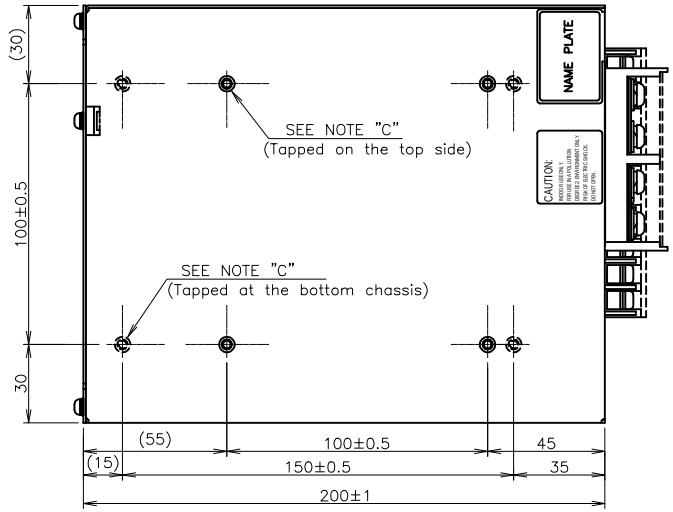

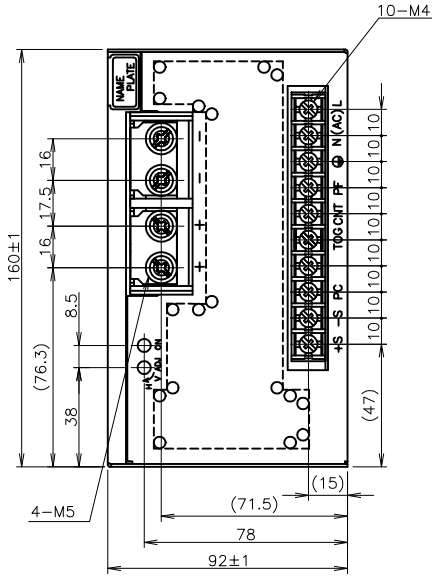

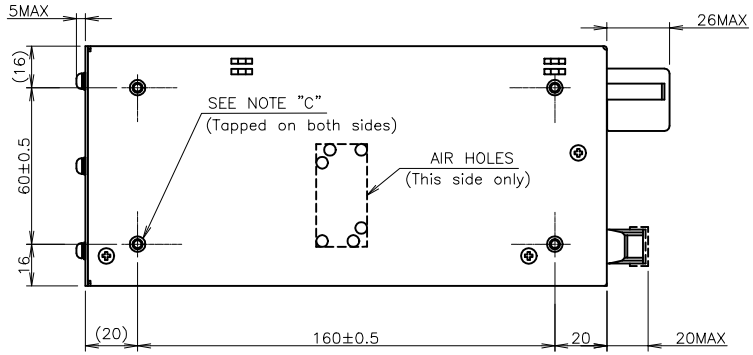



AIR FLOW

DETAIL OF NAME PLATE



SEE NOTE "A"

SEE NOTE "A"

SEE NOTE "B"

ACCESSORIES

* Cover for barrier terminal strip -------- 2
  (Mounted on terminal strip at time of shipment)
* Metal piece for shorting TOG & CNT ---- 1
  (Mounted on terminal strip at time of shipment)
* Sensing wire -------- 2
  (BROWN: + , BLUE: −
  Mounted on terminal strip at time of shipment)

NOTES

A: Model name, nominal output voltage and maximum output current are shown here in accordance with the specifications.

B: Country of manufacture will be shown here.

C: M4 tapped holes (16) for customer chassis mounting.
(Screws must not protrude into power supply by more than 6m/m .)

D: Recommended wire type :
Input and Signals terminal : AWG12−22 (3.5−0.3mm²).
Output terminal : AWG10−18 (5.5−0.83mm²).

(unit : mm)

MODEL	JWS600/508
DENSEI-LAMBDA	

A162−02−01/508−B